


Available Headstyles

Headstyles	Diameter • Plating
G3 	0,28 • Au

Series 1001

Mechanical

Spacing	0,76 mm/30 mil
Full travel	2,00 mm
Recommended working travel	1,35 mm
Pre-loaded spring force	0,13 N
Spring force at working travel (± 20%)	0,30 N

Electrical

max. current rating	0,5 A
Typ. continuity resistance	≤ 150 mOhm

Materials

Barrel	bronze, gold plated
Spring	stainless steel, gold plated
Plunger	steel, gold plated
Receptacle	brass, gold plated


Recommended Diameter of Drill

HP 2361.1 (Trolitax)	0,53 mm
----------------------	----------------

(HSS-Drill, 12000 min.*1)**

SERIES 1001

How to order:

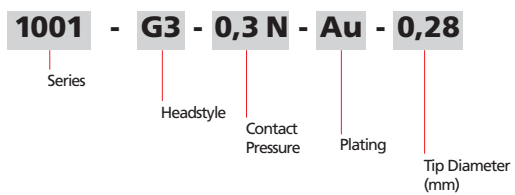

Dimensions and Mounting Measures

