




Available Headstyles

Headstyles	Diameter • Plating
C 	1,00 • Au
D 	0,65 • Au
F 	1,00 • Au

Switching Probe 3030

Mechanical

Spacing	2,54 mm/100 mil
Full travel	6,30 mm
Recommended working travel	5,00 mm
Switching travel (± 0,2mm)	4,00 mm
Pre-loaded spring force	0,30 N
Spring force at switching travel	1,00 N
Spring force at working travel	2,00 N

Electrical

max. current rating	1,0 A
Typ. continuity resistance	≤ 50 mOhm
Insulating Voltage	1000 V

Materials


Barrel	bronze, gold plated
Spring	spring steel, gold plated
Plunger	steel, gold plated
Receptacle	bronze, gold plated

Recommended Diameter of Drill


HP 2361.1 (Trolitax)	1,65 mm
with inserted press ring	1,75 mm
HGW 2372	1,67 mm
with inserted press ring	1,76 mm

How to order:

3030 - C - 2,0 N - Au - 1,0/0,5 x 4,0

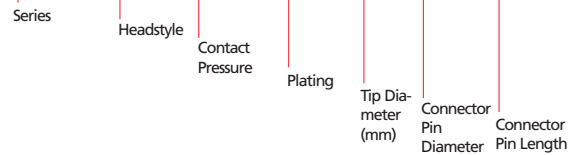

Dimensions and Mounting Measures

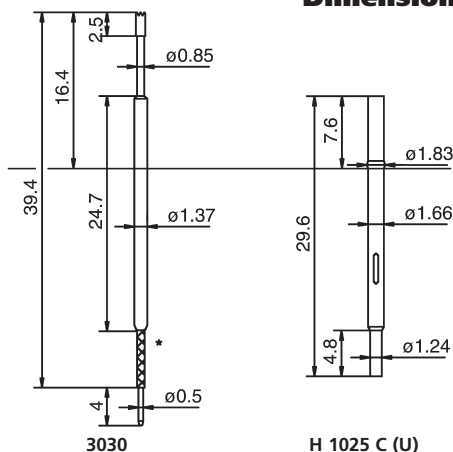

*Temperature range of the insulator (HTK) up to +300°C