





PTR

A Phoenix Mecano Company

SERIES 5207 • 5207/G

Available Headstyles

Headstyles	Diameter • Plating
D 	1,00x1,50 • Au
T 	1,00x0,50 • Au

Coaxial-Test Probe 5207•5207/G

Mechanical	inner-contact	ring-contact
Spacing	6,50 mm	6,50 mm
Full travel	3,50 mm	2,50 mm
Recommended working travel	3,00 mm	2,00 mm
Pre-loaded spring force	0,80 N	3,00 N
Spring force at working travel (± 20%)	1,50 N	5,00 N

Electrical		
max. current rating	1,0 A	6,0 A
Typ. continuity resistance	≤ 10 mOhm	


Materials	
Barrel	CuBe, gold plated
Spring	spring steel, silver plated
Plunger (inner)	steel, gold plated
Plunger (ring)	CuBe, gold plated
Receptacle	brass, gold plated
Connector	brass, tin plated

Recommended Diameter of Drill	H5207	H5207/G
HP 2361.1 (Trolitax)	4,69 mm	5,49 mm
HW 2372	4,70 mm	5,50 mm

Indication for screwing:
hexagon socket 2,0 mm

How to order:

5207/G - D - 1,5 N - Au - 1,0x1,5/6,0 C

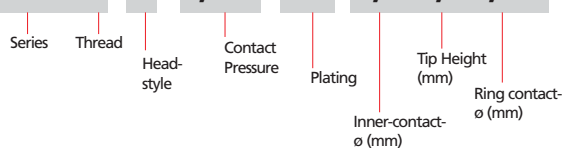

Dimensions and Mounting Measures

